



**EA SERIES - BALA
GRADE 2 CYLINDRICAL KNOB**



DIMENSIONS

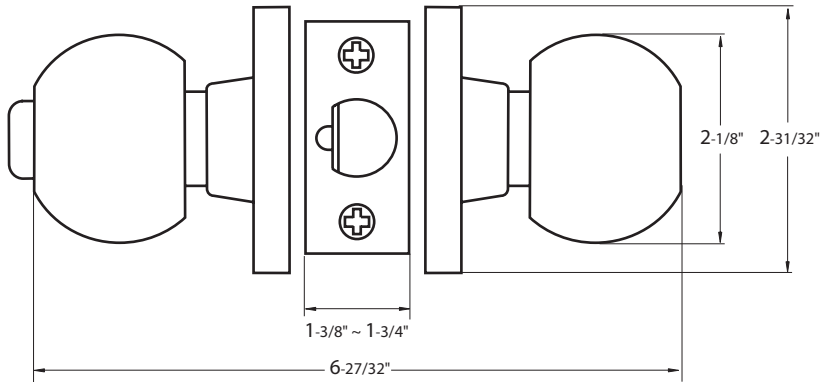

STANDARD SPECIFICATIONS

Door Prep	Cross bore: 2-1/8" Edge bore: 1" Latch face: 2-3/4": 1-1/8" x 2-1/4" 2-3/8": 1" x 2-1/4"	Latches	Entrance: 2-3/4" (E9070T) standard. 2-3/8" (E9060T) optional Pass/Priv: 2-3/4" (E9073T) standard. 2-3/8" (E9063T) optional Faceplate: 2-3/4": 1-1/8" x 2-1/4". 2-3/8": 1" x 2-1/4" Sq. Corner Bolt: 1/2" Stainless Steel throw. Meets 3-Hr. Fire Rating
Backset	2-3/4" UL Latch standard, 2-3/8" optional	Strikes	1-1/8 x 2-3/4" T-strike (9106)
Door Thickness	1-3/8" ~ 2". Adjustable mounting plate	Door Handing	Not Required
Cylinder	SC4 6-pin standard, KW1 5-pin optional Entries packed KA2	Interchangeable Core	Optional small-format 6-pin or 7-pin available
ANSI & Federal Standards	<ul style="list-style-type: none"> Meets & exceeds requirements of BHMA/ANSI A156.2 Series 4000, GR2, 400,000 Cycles. Meets FF-H-106C Federal Standard. 	Product Features	<ul style="list-style-type: none"> Concealed Mounting Screws Panic Proof

PRICING

Model	Function	WT/LB	CTN QTY		US32D	US3	US10B	US32D EI-IC Core (Core not included)
100-EA	Entrance	34 Lbs	20 Pcs	Item No.	333002	333003	333000	300500
				List Price				
104-EA	Storeroom	34 Lbs	20 Pcs	Item No.	333622	—	—	—
				List Price				
101-EA	Passage	28 Lbs	20 Pcs	Item No.	333822	—	—	—
				List Price				
102-EA	Privacy	30 Lbs	20 Pcs	Item No.	333312	—	—	—
				List Price				
115-EA	Dummy	13 Lbs	20 Pcs	Item No.	330752	—	—	—
				List Price				

Core not Included see page F-10.

FUNCTIONS

See Function Guide on Page F-14.



THE DELANEY CO.

Copyright © THE DELANEY CO. All rights reserved.