


INSTALLATION INSTRUCTIONS

A. DOOR & JAMB PREPARATION / LATCH INSTALLATION


1. Mark Door

- Use the template provided to mark door for drilling 3/8" (9.5mm) from jamb to center of door knob (110mm) above door knob or lever center to center.




2. Drill Holes

- Bore 2.1/8" (54mm) hole through door face from both sides of door to avoid damaging door surface.




3. Install Deadbolt Latch

- Insert deadbolt latch into hole, secure this plate all around and the screw hole.




4. Chisel recess for face plate.

- Chisel recess for face plate. Chisel depth.



5. Install Strike Plate

- Chisel outline for strike plate 1.6" (41mm) deep or until plate is flush with door jamb.
- Install strike plate with screws.




6. Make sure the face plate of the lock is even with edge of door.

- Make sure the face plate of the lock is even with edge of door.




B. INSTALLATION OF DEADBOLT ASSEMBLY


- Open door to ease installation.
- Place exterior deadbolt assembly on exterior of door, aligning tailpiece horizontally through deadbolt latch while passing the wire up the deadbolt latch to the interior side of the door.



- Drill Hole
 - Drill 1" (25.4mm) hole in door jamb.
 Caution: Hole in door jamb must be drilled 1" (25.4mm) deep.




- Install Strike Plate
 - Chisel outline for strike plate 1.6" (41mm) deep or until plate is flush with door jamb.
 - Install strike plate with screws.

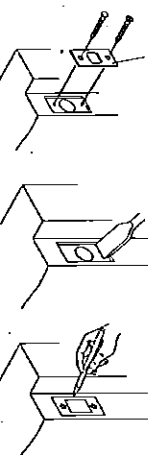


C. ADJUSTING RECEIVER MODULE

- On interior side of door, place mounting plate so the wire is routed up through bridge in plate, and recess of mounting plate is aligned with center of large hole.
- Secure and fasten mounting plate with screws (2) which engage with threaded holes of exterior key cylinder.
- Ensure the mounting plate is positioned vertically.




- When standing on an exterior side of door, if hinges are to your right, you have a right-handed door. If hinges are to your left, you have a left-handed door.
- If you have a right-handed door, move the Entry Switch to "R" by pen. If you have a left-handed door, move the Entry Switch to "L".

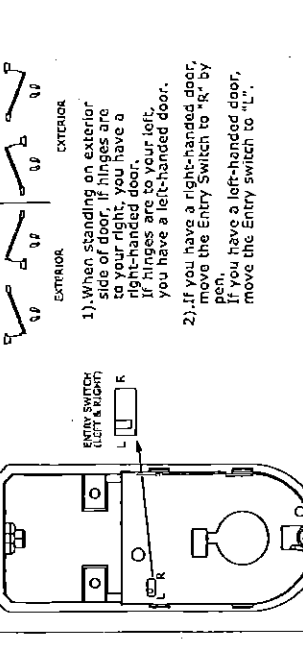


D. INSTALLATION OF RECEIVER MODULE


- Remove battery cover from receiver module by sliding in an cover upward.
- Position receiver module over mounting plate so turnpiece engages with tailpiece.
- If you have a right-handed door, move turnpiece vertically. If you have a left-handed door, move turnpiece horizontally.
- Check operation of the deadbolt manually turning the turnpiece or using the key. Bolt should extend and retract freely. If bolt can not be moved freely, the direction of Entry Switch is in the wrong place. Move receiver module and turn the Entry Switch to the opposite direction. Install again and check the operation of bolt.
- Connect interior wire connector to exterior wire connector.
- Secure receiver module to mounting plate, using the screws provided. Do not over tighten screws, then put on Logo.
- Install (4) AA alkaline batteries as indicated by the markings on receiver module.

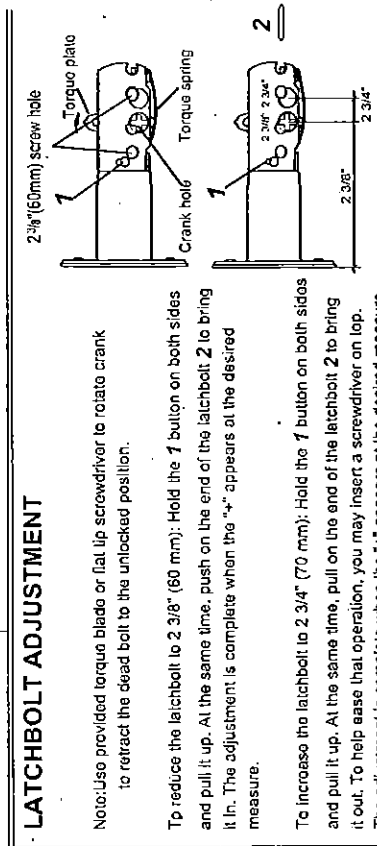

LATCHBOLT ADJUSTMENT

- Note: Use provided torque blade or flat tip screwdriver to rotate crank to retract the dead bolt to the unlocked position.
- To reduce the latchbolt to 2.3/8" (60 mm): Hold the 1 button on both sides and pull it up. At the same time, push on the end of the latchbolt 2 to bring it in. The adjustment is complete when the "+" appears at the desired measure.
- To increase the latchbolt to 2.3/4" (70 mm): Hold the 1 button on both sides and pull it up. At the same time, pull on the end of the latchbolt 2 to bring it out. To help ease that operation, you may insert a screwdriver an lap. The adjustment is complete when the "+" appears at the desired measure.





OPERATION MANUAL

The default **Master PIN** of lock is preset to '1-2-3-4' in the factory.
Please change the **Master PIN** as soon as possible after installation to ensure the security.
(See the Step 1 for reference)

To Unlock

Input the **Master PIN** (or **Auxiliary PIN**) and follow by pressing **Ⓜ** button to unlock. You will hear one warning beep if you input one wrong PIN.

To Lock

Press **Ⓜ** button to lock. If the **Turn Piece** jams, the **Action LED** will flash red and you will hear one warning beep.

When you input a wrong PIN

The lockset will stop operating for 2 minutes after inputting 30 continuous digits. The lockset will stop operating for 2 minutes after inputting a wrong PIN for 4 times.

Power Supply

DV 6V (1.5V alkaline battery UM-3* 4pcs)

<p>1. To Change the Master PIN or Auxiliary PIN</p> <p>1.1 Input your original Master PIN (or Auxiliary PIN) and follow by pressing Ⓜ button to unlock and then press and hold the Ⓜ button for three seconds.</p> <p>1.2 Once the Action LED starts to flash red 2 times and you hear 2 long beeps, release the Ⓜ button.</p> <p>1.3 While the Action LED illuminates both red and green, press the 1 button within 5 seconds.</p> <p>1.4 While the Action LED flashes between red and green, enter your new PIN (up to 4-12 digits in length) and follow by pressing Ⓜ button to store the new PIN.</p> <p>1.5 After Step 1.4, the Action LED should flash green 1 time and you should hear one melody. It means the operation is successful.</p> <p>Note : (1) Do not delay between inputting each number. The lock will remain the previous status if you fail to input the new PIN.</p> <p>(2) For security purpose, if your new PIN has more than 4 continuous digits same as the previous PIN which has been stored, this new PIN will not be allowed to store.</p> <p>For example, if there is one PIN "12345" stored in the lockset, your new PIN can't be "12345".</p>	<p>2. To Add Auxiliary PIN (Up to 6 different Auxiliary PINs)</p> <p>2.1 Input your original Master PIN and follow by pressing Ⓜ button to unlock and then press and hold the Ⓜ button for three seconds.</p> <p>2.2 Once the Action LED starts to flash red 2 times and you hear 2 long beeps, release the Ⓜ button.</p> <p>2.3 While the Action LED illuminates both red and green, press the 2 button within 5 seconds.</p> <p>2.4 While the Action LED flashes red, enter your new Auxiliary PIN (up to 4-12 digits in length) and follow by pressing Ⓜ button to store the new Auxiliary PIN.</p> <p>2.5 After Step 2.4, the Action LED should flash green 1 time and you should hear one melody. It means the operation is successful.</p> <p>2.6 To add another Auxiliary PIN, just simply repeat step 2.4.</p> <p>Note : (1) Do not delay between inputting each number. The lock will remain the previous status if you fail to add the new Auxiliary PIN.</p> <p>(2) For security purpose, if your new Auxiliary PIN has more than 4 continuous digits same as any one of the previous Auxiliary PINs which have been stored, the new Auxiliary PIN will not be allowed to store. For example, if there is one Auxiliary PIN "12345" stored in the lockset, your new Auxiliary PIN can't be "12345".</p>	<p>3. To Delete all Auxiliary PIN</p> <p>3.1 Input your original Master PIN and follow by pressing Ⓜ button to unlock and then press and hold the Ⓜ button for three seconds.</p> <p>3.2 Once the Action LED starts to flash red 2 times and you hear 2 long beeps, release the Ⓜ button.</p> <p>3.3 While the Action LED illuminates both red and green, press and hold the Ⓜ button within 5 seconds.</p> <p>3.4 After Step 3.3, the Action LED should simultaneously flash red and green 4 times and then flash green 1 time and you should hear one melody. It means all previous Auxiliary PINs are deleted successfully.</p>	<p>4. When you forget the Master PIN</p> <p>4.1 Take off the batteries from Receiver Module. Press any button on the keypad 3 times. Wait for 10 seconds and then put the batteries back.</p> <p>4.2 Once you hear a long beep and a short beep, press and hold the Ⓜ button for three seconds.</p> <p>4.3 Once the Action LED starts to flash red 3 times and you hear 3 long beeps, release the Ⓜ button.</p> <p>4.4 Within 15 seconds, input the new Master PIN (up to 4-12 digits in length) and follow by pressing Ⓜ button.</p> <p>4.5 Input the new Master PIN and follow by pressing Ⓜ button again.</p> <p>4.6 After Step 4.5, the Action LED should flash green 1 time and you should hear one melody. It means the operation is successful.</p> <p>(All previous Auxiliary PINs will be deleted.)</p> <p>Note : The Master PIN will remain the previous one, if you fail to complete any one of above steps.</p>
<p>5. Automatic Locking Setting</p> <p>5.1 Automatic Locking (1) Input the Master PIN (or Auxiliary PIN) and follow by pressing Ⓜ button to unlock and then immediately press and hold 1 button. (2) Release the 1 button when you hear one melody and the Action LED flashes green 1 time. It means the operation is successful. (No delay between inputting the Master PIN and 1 button)</p> <p>5.2 Manual Locking - (1) Input the Master PIN (or Auxiliary PIN) and follow by pressing Ⓜ button to unlock and then immediately press and hold 2 button. (2) Release the 2 button when you hear one melody and the Action LED flashes green 1 time. It means the operation is successful. (No delay between inputting the Master PIN and 2 button)</p>	<p>6. Programming Master Remote Control</p> <p>6.1 Take off the batteries from Receiver Module and then put the batteries back.</p> <p>6.2 Once you hear a long beep and a short beep, press and hold the Ⓜ button for three seconds.</p> <p>6.3 Once the Action LED starts to flash red 3 times and you hear 3 long beeps, release the Ⓜ button.</p> <p>6.4 Within 15 seconds, point the Master Remote Control toward the Action LED and press any button on the Master Remote Control.</p> <p>6.5 After Step 6.4, the Action LED should flash green 1 time and you should hear one melody. It means the operation is successful.</p> <p>(All previous Auxiliary Remote Controls will be deleted.)</p> <p>Note : The Master Remote Control will remain the previous one, if you fail to complete any one of above steps within 15 seconds.</p>	<p>7. Add Auxiliary Remote Control</p> <p>7.1 Use the Master Remote Control to unlock and then press and hold the Ⓜ button for three seconds.</p> <p>7.2 Once the Action LED flashes red 2 times and you hear 2 long beeps, release the Ⓜ button.</p> <p>7.3 Within 15 seconds, point the Auxiliary Remote Control toward the Action LED and press any button on the Auxiliary Remote Control.</p> <p>7.4 After Step 7.3, the Action LED should flash green 1 time and you should hear one melody. It means the operation is successful.</p> <p>7.5 To add another Auxiliary Remote Control, just simply repeat step 7.3.</p>	<p>8. Delete all Auxiliary Remote Controls</p> <p>8.1 Use the Master Remote Control to unlock and then press and hold the Ⓜ button for three seconds.</p> <p>8.2 Once the Action LED flashes red 2 times and you hear 2 long beeps, release the Ⓜ button.</p> <p>8.3 While the Action LED illuminates red, press and hold the Ⓜ button within 5 seconds.</p> <p>8.4 After Step 8.3, the Action LED should simultaneously flash red and green 4 times and flash green 1 time and you should hear one melody. It means all previous Auxiliary Remote Controls are deleted successfully.</p>

<p>Low Battery Warning</p> <p>The Action LED will flash red and you will hear quick and short beeps 15 times.</p>	<p>The Latch is not in the correct position</p> <ul style="list-style-type: none"> - The Action LED flashes green 1 time when the door is locked properly. - The Action LED flashes red 1 time when the door is locked improperly. 	<p>★ Note</p> <p>If your product DID NOT come with a remote control, Skip step 6, 7, 8.</p>
---	---	--